

1

2

3

4

5

6

RevNo

Revision note

Date

Signature

Checked

A

B

C




D

A

B

C

D

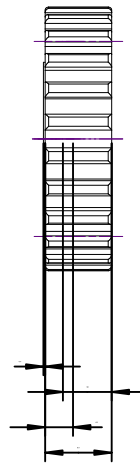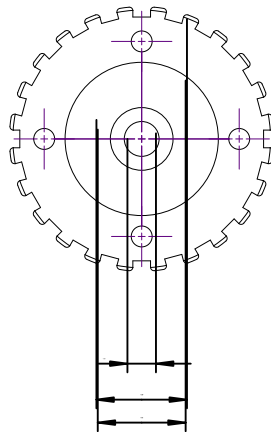

4 M3 clearance holes counterbored to clear heads of cap screws.
28mm PCD.Spot through onto 40 tooth wheel.

Inner 5mm hole is countersunk on the inside to take the screw
which mounts the 10 tooth wheel.

Itemref	Quantity	Title/Name, designation, material, dimension etc				Article No./Reference	
Drawn by John Olsen		Checked by	Approved by - date		File name	Date 20/8/10	Scale
			Countershaft Assembly 24 tooth wheel				
			U2				Edition

1

2

3

6