

1

2

3

4

5

6

RevNo

Revision note

Date

Signature

Checked

A

A

B

B




C

C

D

D

Flange fastened to wheel after cutting teeth.  
 Easiflo if brass or use four M2 Countersunk head screws.  
 Heads must be flush to clear belt.

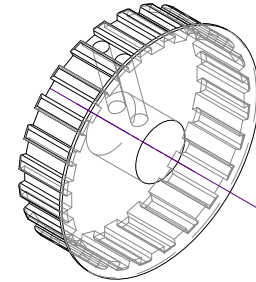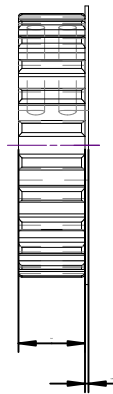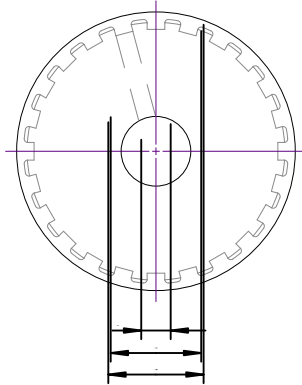

Itemref	Quantity	Title/Name, designation, material, dimension etc				Article No./Reference	
Drawn by John Olsen		Checked by	Approved by - date		File name	Date 20/8/10	Scale
			Motor Shaft Assembly 24 Tooth Wheel				
			U12				Edition

1

2

3

6